

High Performance, Dual Thermal and Visible OEM Camera Module

HADRON™ 640 SERIES




For FLIR Sales and Service contact us at:
Phone: 1-888-919-2263 | Outside the U.S.: +1-845-343-4077 | Fax: +1-845-343-4299
Address: P.O. Box 4242 Middletown, New York 10941 USA

The ITAR-free Hadron 640 series pairs a 64MP visible camera with a performance-leading 640x512 resolution radiometric Boson® or Boson+ thermal camera in a single easy-to-integrate module. With a size, weight, and power (SWaP) optimized design, it is an ideal dual sensor payload for integration into unmanned aircraft systems (UAS), unmanned ground vehicles (UGV), robotic platforms, and emerging AI applications utilizing Teledyne FLIR Prism™ software.

Hadron 640 models share mechanical and electrical interfaces simplifying design. Compatible with Teledyne FLIR's Prism AI detection, tracking, and classification models and Prism ISP libraries for super-resolution, turbulence mitigation, contrast enhancement, and more, Hadron 640 series enables effective AI-based applications. With drivers available for market leading processors from NVIDIA®, Qualcomm®, and more plus industry-leading integration support, Hadron 640 also reduces development cost and shortens time to market.

Evaluate Prism with the Hadron 640R using the Prism Development Kit for Qualcomm RB5 today.

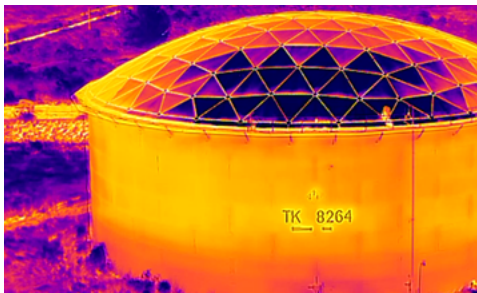

INDUSTRY-LEADING THERMAL AND VISIBLE CAMERA PERFORMANCE

Collect high-speed, dual VGA radiometric thermal and HD visible imagery in all light conditions.


- AI-ready with Teledyne FLIR Prism AI and ISP
- 64MP visible camera resolution
- Available radiometric, 640x512-resolution Boson+ provides industry leading NEDT of ≤ 20 mK
- Flexible dual 60 Hz video output via USB or MIPI



BUILT FOR INTEGRATORS

Reduce development cost and time to market with solution from a single, reliable supplier

- ITAR free and classified under US Department of Commerce jurisdiction as ECCN 6A003.b.4.b
- Drivers and sample code available for NVIDIA Jetson Nano, Qualcomm RB5, and more
- Highly qualified, technical services team available to support integration
- Evaluate capabilities with Prism Development Kit for Qualcomm RB5

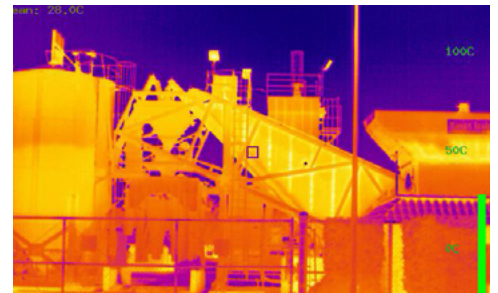

SIZE, WEIGHT, AND POWER OPTIMIZED DESIGN

Optimize design and operation time with compact, lightweight, and low-power module.

- Low, steady state power consumption at 1.8W
- IP54-rated dust and water protection
- Lightweight 56 g enables longer flight time and extends battery life
- Shared mechanical and electrical interface across all models


For more information visit:
www.flir.com/hadron

Imagery for illustration purposes only. Specifications are subject to change without notice. ©2025 Teledyne FLIR LLC, Inc. All rights reserved.
01/30/2025 REV1

SPECIFICATIONS

Imaging & Optical		Hadron 640R	Hadron 640+	Hadron 640R+
Thermal Imaging Detector	Boson 640 x 512 pixels, 12 µm pitch, USB 3.0, 2-lane MIPI		Boson+ 640 x 512 pixels, 12 µm pitch, USB 3.0, 2-lane MIPI	Boson+ 640 x 512 pixels, 12 µm pitch, USB 3.0, 2-lane MIPI
Thermal Sensitivity	<40 mK		<20 mK	<20 mK
EO Camera Optics	EFL 4.8mm, 67° HFOV, F/# 1/2.3			
EO Camera Sensor	9248 x 6944 pixels (64.2 MP), 0.7 µm pitch, 4-lane MIPI			
EO Camera Video	Full resolution @ 60Hz			
Aspect Ratio, Visible	4 to 3			
IMU	ICM20602, I2C or SPI (selectable)			
IR Camera Optics	EFL 13.6mm, 32° HFOV, F/# 1.0			
IR Camera Video	Full resolution @ 60Hz			
Aspect Ratio, Thermal	5 to 4			
Radiometry				
Temperature Accuracy	±5 °C or less, over 0 °C to 100 °C range		Non-Radiometric	±5 °C or less, over 0 °C to 100 °C range
Electrical				
Electrical Interface	Hirose DF40C-50DP-0.4V(51) Example of mating connector: DF40HC(2.5)-50DS-0.4V(51)			
Power	5V supply voltage. Typical power dissipation < 1800mW, Max < 2900mW			
Mechanical				
Mechanical Interface	Screw mount to back plate			
Size [w_o lens]	35 x 49 x 45 mm (1.38" x 1.93" x 1.77")			
Weight	56 g			
Environment & Approvals				
Environmental Sealing	IP54 (with the rear interfaces sealed)			
Operational & Storage Temperature	-20 °C to +60 °C			
Tested EMI Performance	FCC part 15 Class B			
Software				
Software Drivers*	NVIDIA Jetson Nano, Qualcomm Snapdragon RB5, Qualcomm Snapdragon 865 *Contact Teledyne FLIR for latest software drivers			
Ordering				
Part Numbers	70640A034-6C48068		70640AS32-6PAAXP	70640AS32-6PARXP

DEVELOPMENT KITS



NVIDIA Jetson Nano



Qualcomm Snapdragon RB5



Qualcomm Snapdragon 865

SANTA BARBARA
Teledyne FLIR LLC, Inc.
6769 Hollister Ave.
Goleta, CA 93117
PH: +1 805.690.6602

EUROPE
Teledyne FLIR LLC, Inc.
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5106

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.flir.com/hadron

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2024 Teledyne FLIR LLC, Inc.

Approved for public release. Teledyne FLIR Approved [FLIRGTC-SBA-001]

All rights reserved. Revised 01/30/2025

24-0531-OEM-UAS-Hadron-640-Datasheet-LTR

For more information visit:
www.flir.com/hadron