REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	P01	PRELIMINARY RELEASE	09/24/2018	

NOTES: UNLESS OTHERWISE SPECIFIED

1. INDICATED DIMENSIONS ARE FOR AN ARRAY SIZE OF 640x512@12µm.
2. CONECTOR INTERFACE: HIROSE DF40C-80DP-0.4V(51). MATING CONNECTOR HIROSE DF40C(4.0)80DS-0.4V(51). FOR PIN-OUT DESIGNATIONS SEE BOSON CAMERA USER MANUAL.
3. INDICATED ALLOWABLE TRAVEL FOR FOCUS (±0.50mm).
4. CAMERA WEIGHT NO LENS 10.20 GRAMS, LENS WEIGHT, 13.6mm-f1.0: 12.50 GRAMS. TOTAL CAMERA WEIGHT: 22.70 GRAMS

5. THE INDICATED SURFACE IS THE MOST OPTIMAL MOUNTING/HEATSINKING SURFACE IN ORDER TO PROVIDE THE MOST UNIFORM THERMAL PERFORMANCE OF THE BOSON CAMERA CORE.

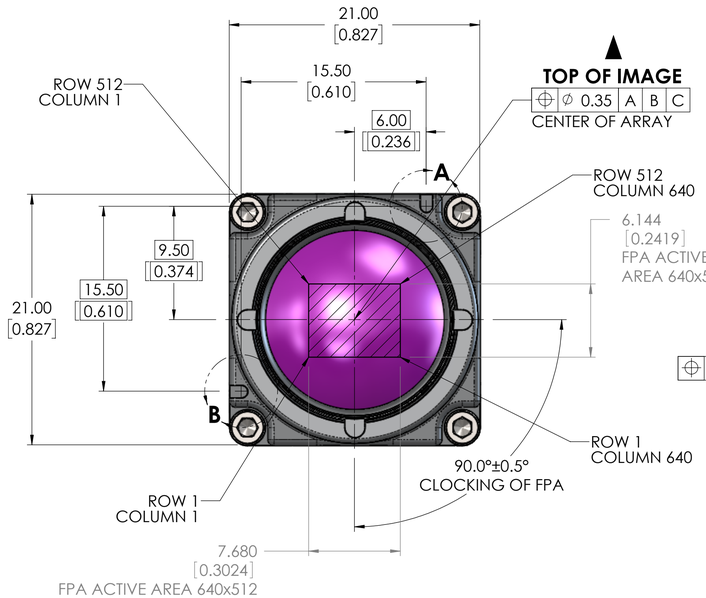

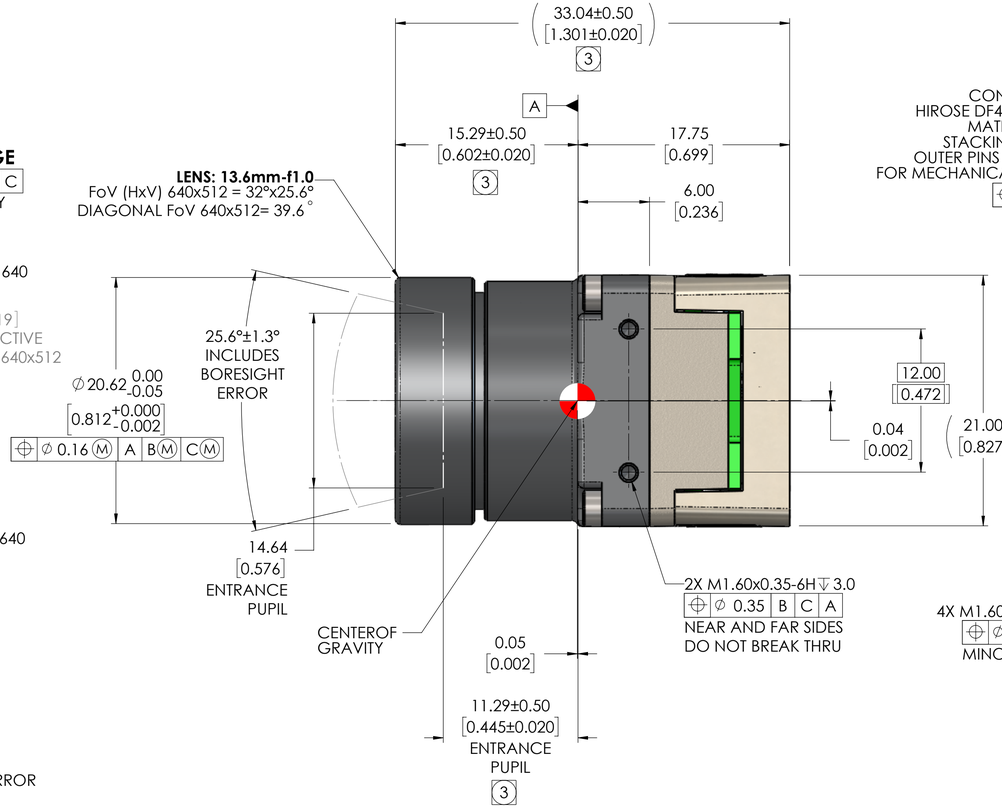

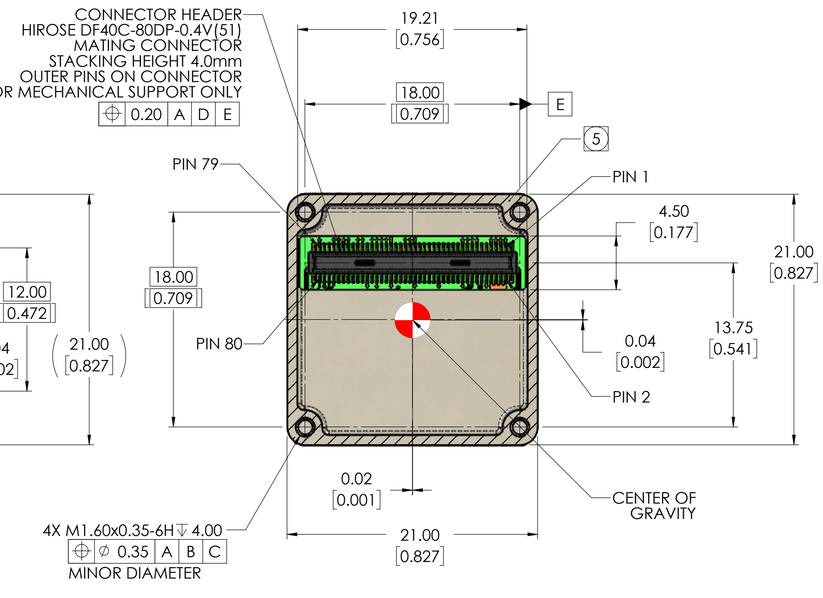

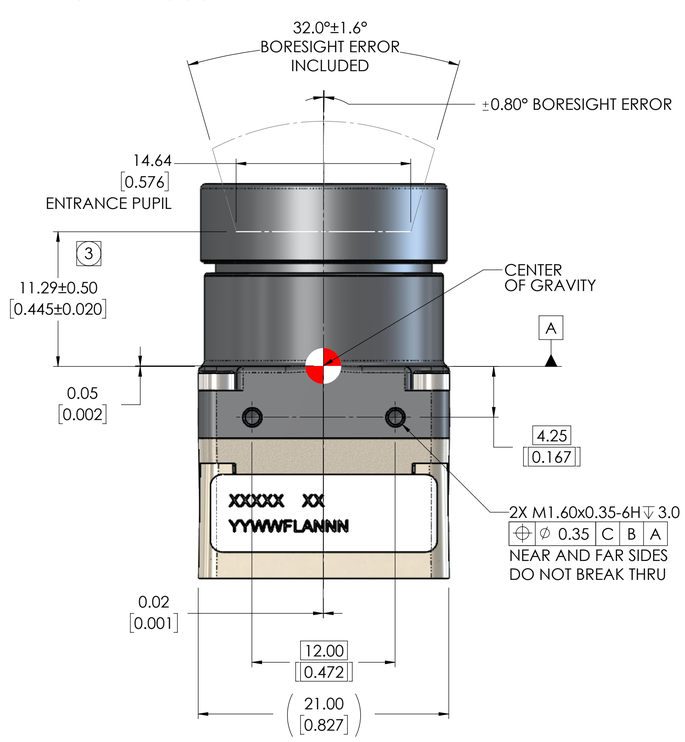

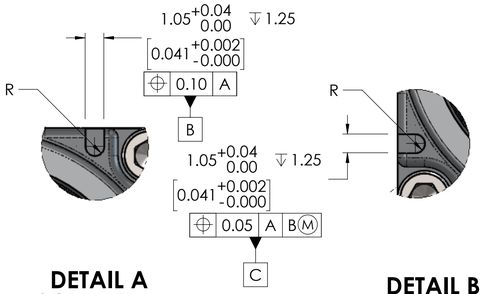

DETAIL A
SCALE 6 : 1

DETAIL B
SCALE 6 : 1

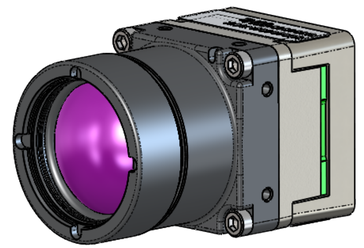

THIRD ANGLE PROJECTION	**PROPRIETARY - FLIR SYSTEMS, INC.** THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION TO FLIR SYSTEMS, INC. THIS INFORMATION MUST BE MAINTAINED IN CONFIDENCE AND USED ONLY IN A MANNER CONSISTENT WITH THE DOCUMENTATION AND ANY EXECUTED NON DISCLOSURE AGREEMENT, AND MAY NOT BE DISCLOSED TO ANY THIRD PERSON WITHOUT FLIR'S WRITTEN CONSENT.
	THIS DOCUMENT DOES NOT CONTAIN ANY EXPORT-CONTROLLED INFORMATION.
METRIC	
INTERPRET DRAWING PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS 32 .X = ±.25 .XX = ±.13 ANGULAR = ±.5° FILLET RADII = .13 MAX	MATERIAL FINISH UNLESS OTHERWISE SPECIFIED ALL MEASUREMENTS ARE IN MM. ALL DIMENSIONS IN [ ] ARE INCHES. DO NOT SCALE DRAWING. CALC WT:

PROJECT NO.	APPROVALS	DATE
DWN	COVINGTON	09/25/18
CHK		
DSGN		
ENG		
APP		

FLIR Systems, Inc.
6769 Hollister Ave
Goleta, CA 93117

TITLE: **IDD, BOSON 640 SHUTTERLESS CAMERA CORE, 13.6mm-f1.0 SMALL**

SIZE	CAGE	DWG NO.	REV
D	064Y2	21-640S 13.6mm-f1.0	P01

SCALE 4:1 | PRINTED: 4/30/2020 | SHEET 1 OF 1

SOLIDWORKS MODEL: 21-Boson Shutterless Camera Core
MODEL REVISION: F

DWG NO. 21-640S 13.6mm-f1.0 SH 1 REV P01